

FLARE-B

29 x 23 mm lens with ~100° x 10° oval beam.
Assembly with installation tape.

SPECIFICATION:

Dimensions	29.0 x 22.8 mm
Height	12.8 mm
Fastening	tape, screw
ROHS compliant	yes ⓘ




MATERIALS:

Component	Type	Material	Colour	Finish
FLARE-B	Single lens	PMMA	clear	
FLARE-B-TAPE	Tape	Acrylic foam	black	

ORDERING INFORMATION:

Component		Qty in box	MOQ	MPQ	Box weight (kg)
CA10932_FLARE-B	Single lens	2448	288	144	9.8
» Box size: 476 x 273 x 292 mm					

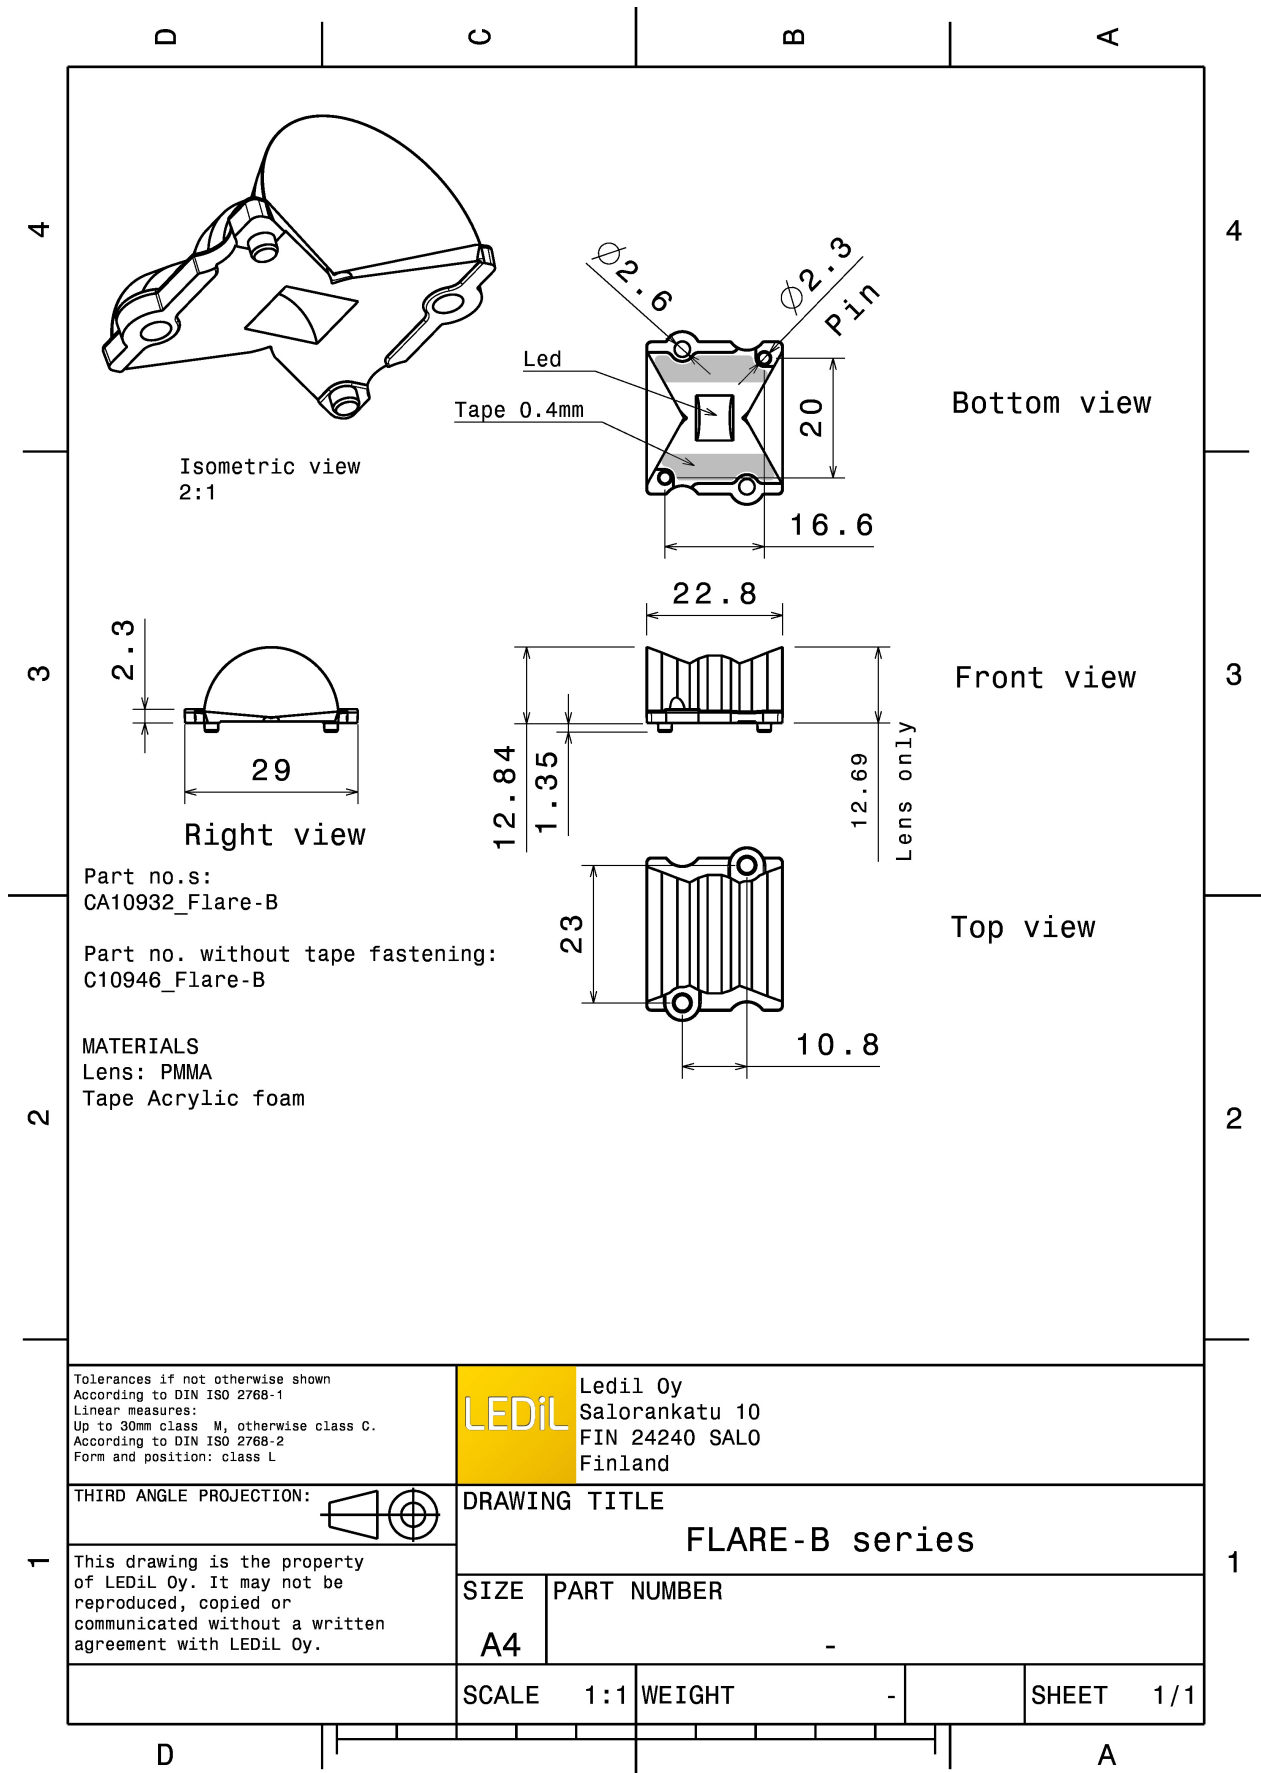


See also our general installation guide: www.ledil.com/installation_guide


OPTICAL RESULTS (MEASURED):





LED XB-D
FWHM / FWTM 10.0 + 108.0° / 30.0 + 167.0°
Efficiency 93 %
Peak intensity 1.5 cd/lm
LEDs/each optic 1
Light colour White
Required components:

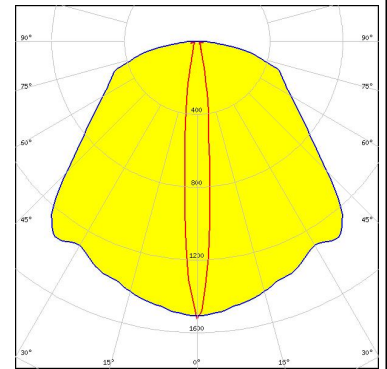



LED XP-E
FWHM / FWTM 102.0 + 10.0° / 154.0 + 26.0°
Efficiency 93 %
Peak intensity 1.8 cd/lm
LEDs/each optic 1
Light colour White
Required components:

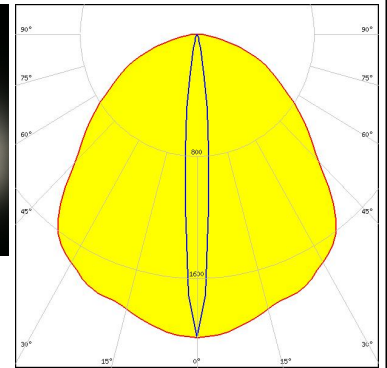

LED XP-E2
FWHM / FWTM 11.0 + 101.0° / 22.0 + 150.0°
Efficiency 94 %
Peak intensity 2.3 cd/lm
LEDs/each optic 1
Light colour White
Required components:

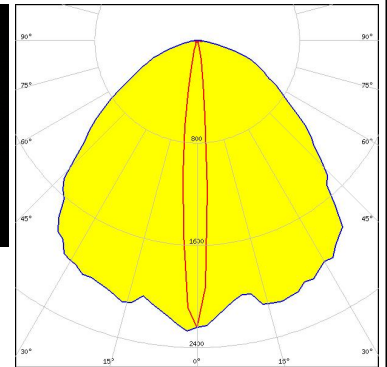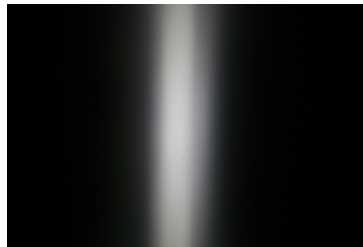


LED LUXEON Rebel
FWHM / FWTM 101.0 + 14.0° / 142.0 + 29.0°
Efficiency 93 %
Peak intensity 1.7 cd/lm
LEDs/each optic 1
Light colour White
Required components:

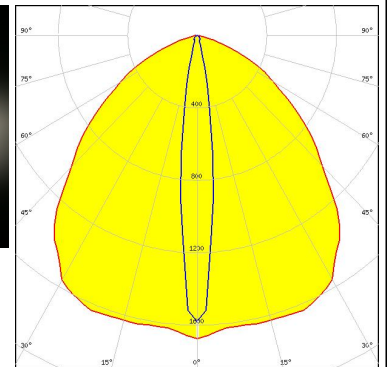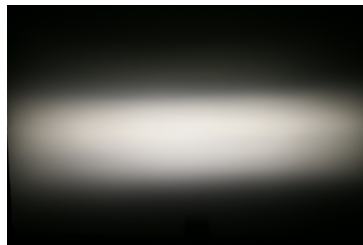

OPTICAL RESULTS (MEASURED):



LUMILEDS

LED LUXEON Rebel ES
FWHM / FWTM 12.0 + 104.0° / 35.0 + 154.0°
Efficiency 94 %
Peak intensity 1.4 cd/lm
LEDs/each optic 1
Light colour White
Required components:

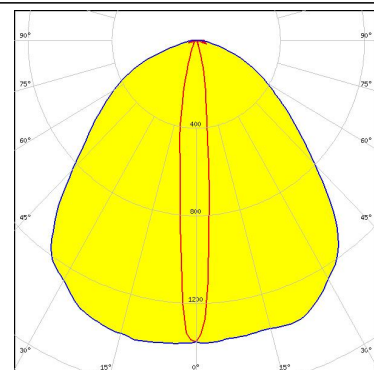



LUMILEDS

LED LUXEON T
FWHM / FWTM 13.0 + 105.0° / 29.0 + 152.0°
Efficiency 93 %
Peak intensity 1.5 cd/lm
LEDs/each optic 1
Light colour White
Required components:

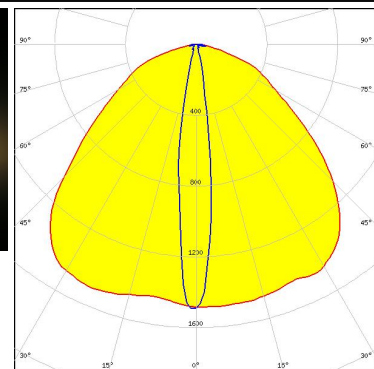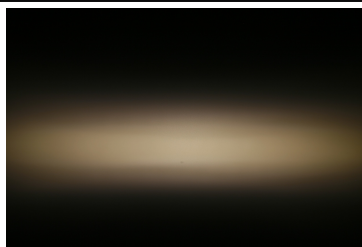


LUMILEDS

LED LUXEON TX
FWHM / FWTM 14.0 + 114.0° / 29.0 + 156.0°
Efficiency 93 %
Peak intensity 1.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:

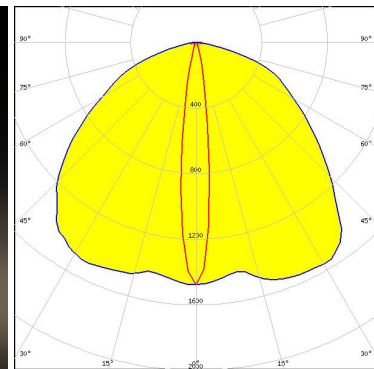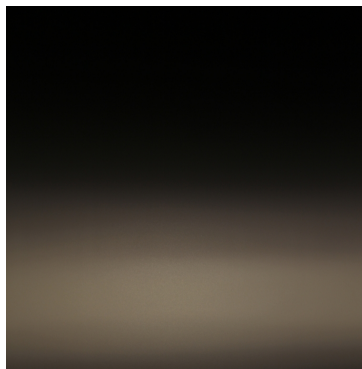

NICHIA


LED NCSxx19A
FWHM / FWTM 9.0 + 88.0° / 26.0 + 154.0°
Efficiency 94 %
Peak intensity 2 cd/lm
LEDs/each optic 1
Light colour White
Required components:

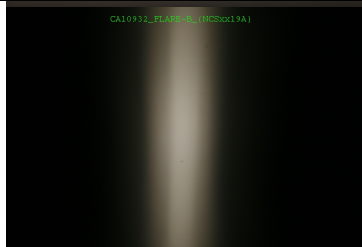



OPTICAL RESULTS (MEASURED):





LED NCSxx19B
FWHM / FWTM 11.0 + 103.0° / 28.0 + 160.0°
Efficiency 94 %
Peak intensity 1.9 cd/lm
LEDs/each optic 1
Light colour White
Required components:

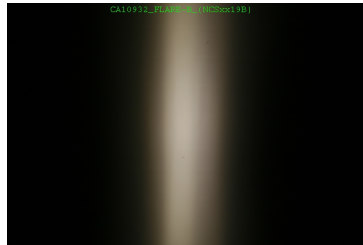



LED NVSW219F
FWHM / FWTM 15.0 + 108.0° / 28.0 + 150.0°
Efficiency 94 %
Peak intensity 1.5 cd/lm
LEDs/each optic 1
Light colour White
Required components:

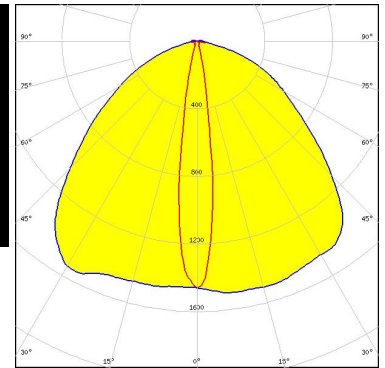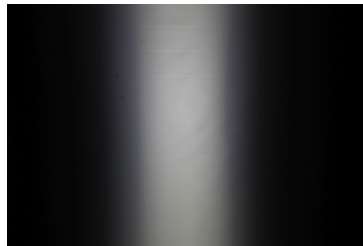

LED NVSxx19B/NVSxx19C
FWHM / FWTM 14.0 + 110.0° / 27.0 + 151.0°
Efficiency 94 %
Peak intensity 1.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:

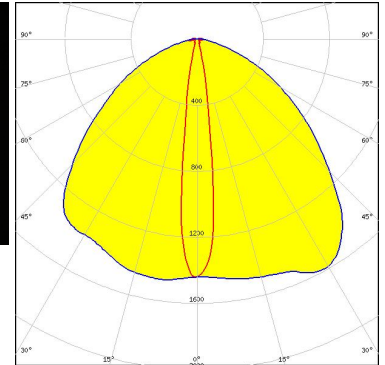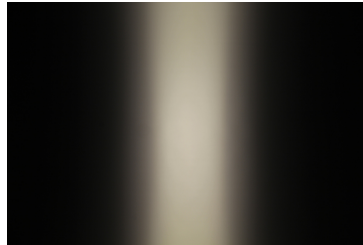


LED OSLON Square EC
FWHM / FWTM 13.0 + 104.0° / 26.0 + 157.0°
Efficiency 94 %
Peak intensity 1.7 cd/lm
LEDs/each optic 1
Light colour White
Required components:

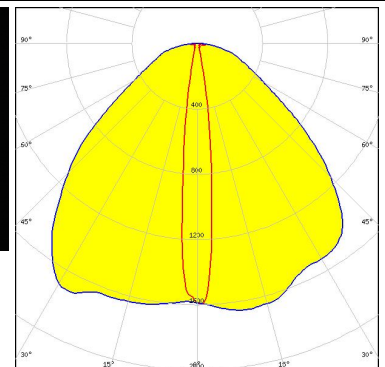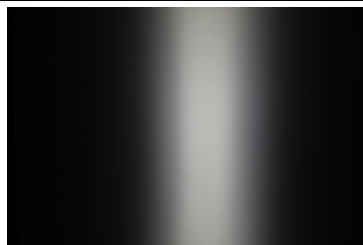

OPTICAL RESULTS (MEASURED):



OSRAM Opto Semiconductors

LED OSLON Square EC
FWHM / FWTM 12.0 + 104.0° / 33.0 + 162.0°
Efficiency %
LEDs/each optic 1
Light colour White
Required components:

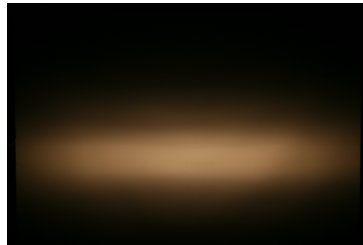


OSRAM Opto Semiconductors

LED OSLON SSL 150
FWHM / FWTM 9.0 + 117.0°
Efficiency 93 %
Peak intensity 1.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:

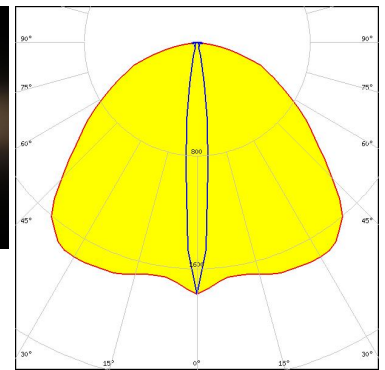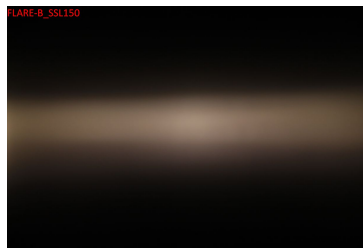



OSRAM Opto Semiconductors

LED OSLON SSL 80
FWHM / FWTM 83.0 + 11.0° / 144.0 + 24.0°
Efficiency 93 %
Peak intensity 2.2 cd/lm
LEDs/each optic 1
Light colour White
Required components:



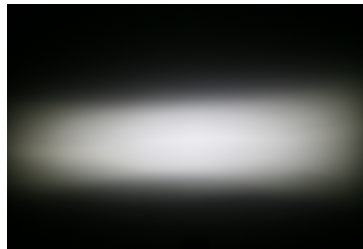


SEOUL SEMICONDUCTOR

LED WICOP 5050
FWHM / FWTM 26.0 + 111.0° / 44.0 + 159.0°
Efficiency 97 %
Peak intensity 0.9 cd/lm
LEDs/each optic 1
Light colour White
Required components:

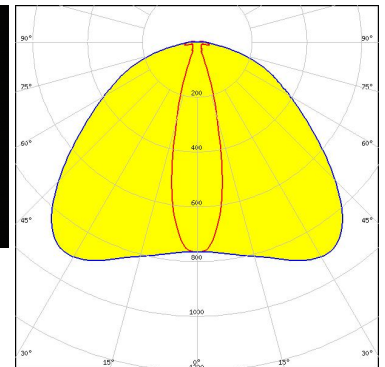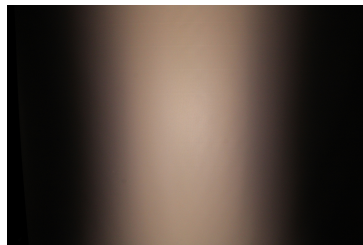


OPTICAL RESULTS (MEASURED):

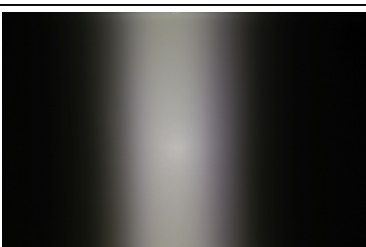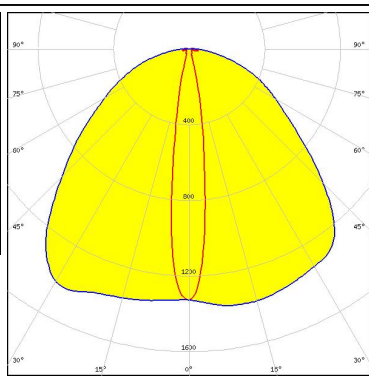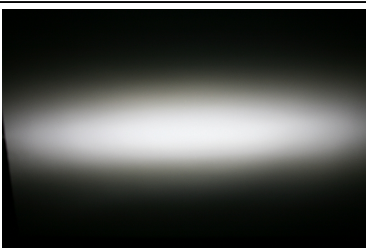 SEOUL SEMICONDUCTOR LED Z5 FWHM / FWTM 12.0 + 96.0° Efficiency % LEDs/each optic 1 Light colour White Required components:	
 SEOUL SEMICONDUCTOR LED Z5M3 FWHM / FWTM 15.0 + 108.0° / 30.0 + 161.0° Efficiency 94 % Peak intensity 1.4 cd/lm LEDs/each optic 1 Light colour White Required components:	 
SHARP LED Double Dome (GM2BB) FWHM / FWTM 104.0 + 10.0° Efficiency % LEDs/each optic 1 Light colour White Required components:	


OPTICAL RESULTS (SIMULATED):




LED XP-E2
FWHM / FWTM 82.0 + 8.0° / 140.0 + 16.0°
Efficiency 97 %
Peak intensity 2.9 cd/lm
LEDs/each optic 1
Light colour Blue
Required components:

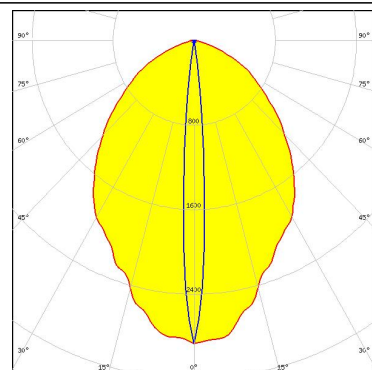


LED XP-G2
FWHM / FWTM 11.0 + 83.0° / 21.0 + 146.0°
Efficiency 94 %
Peak intensity 2.4 cd/lm
LEDs/each optic 1
Light colour White
Required components:

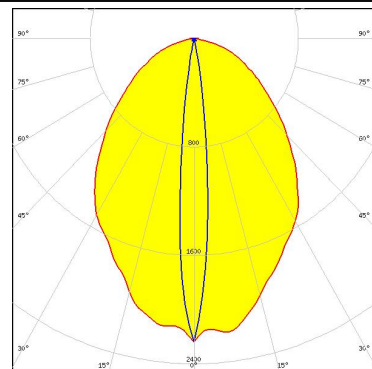

LED XP-G3
FWHM / FWTM 99.0 + 14.0° / 153.0 + 26.0°
Efficiency 95 %
Peak intensity 1.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:

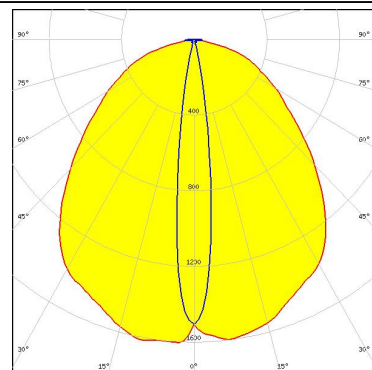


LED XP-L HD
FWHM / FWTM 106.0 + 16.0° / 151.0 + 30.0°
Efficiency 97 %
Peak intensity 1.4 cd/lm
LEDs/each optic 1
Light colour White
Required components:

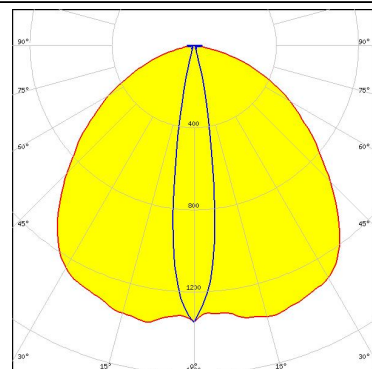

OPTICAL RESULTS (SIMULATED):


LUMILEDS

LED LUXEON C
FWHM / FWTM 83.0 + 8.0° / 169.0 + 16.0°
Efficiency 94 %
Peak intensity 2.4 cd/Im
LEDs/each optic 1
Light colour Blue
Required components:

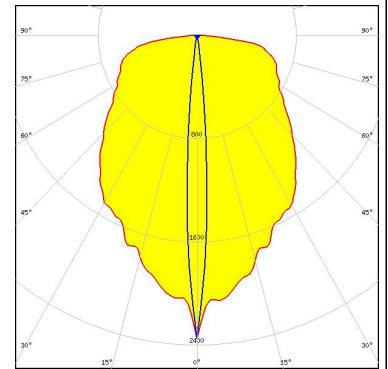


LUMILEDS

LED LUXEON CZ
FWHM / FWTM 6.0 + 54.0° / 15.0 + 134.0°
Efficiency 97 %
Peak intensity 3.9 cd/Im
LEDs/each optic 1
Light colour Red
Required components:

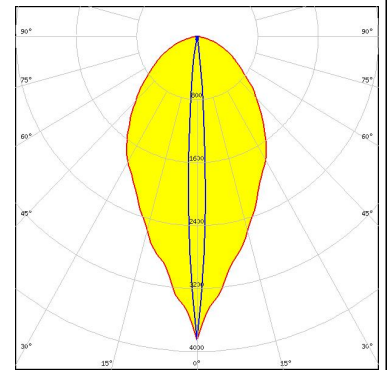


LUMILEDS

LED LUXEON H50-2
FWHM / FWTM 13.0 + 90.0° / 22.0 + 140.0°
Efficiency 94 %
Peak intensity 2.1 cd/Im
LEDs/each optic 1
Light colour White
Required components:

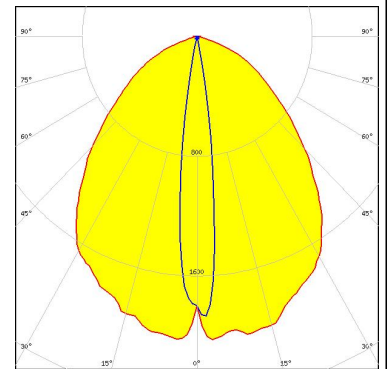

LUMILEDS


LED LUXEON Rubix
FWHM / FWTM 62.0 + 6.0° / 141.0 + 13.0°
Efficiency 97 %
Peak intensity 4 cd/Im
LEDs/each optic 1
Light colour White
Required components:

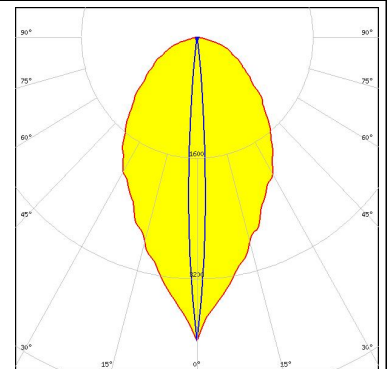

OPTICAL RESULTS (SIMULATED):


LUMILEDS

LED LUXEON Rubix
FWHM / FWTM 60.0 + 6.0° / 140.0 + 12.0°
Efficiency 97 %
Peak intensity 4.2 cd/Im
LEDs/each optic 1
Light colour Blue
Required components:

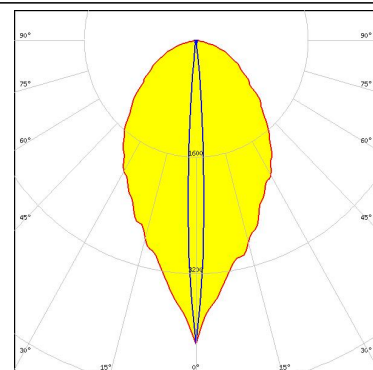


LUMILEDS

LED LUXEON Rubix
FWHM / FWTM 61.0 + 6.0° / 140.0 + 12.0°
Efficiency 97 %
Peak intensity 4.1 cd/Im
LEDs/each optic 1
Light colour Green
Required components:

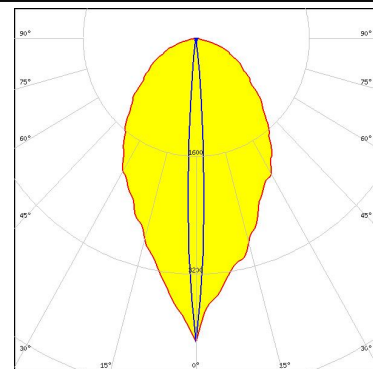


LUMILEDS

LED LUXEON Rubix
FWHM / FWTM 52.0 + 6.0° / 134.0 + 12.0°
Efficiency 97 %
Peak intensity 4.5 cd/Im
LEDs/each optic 1
Light colour Red
Required components:

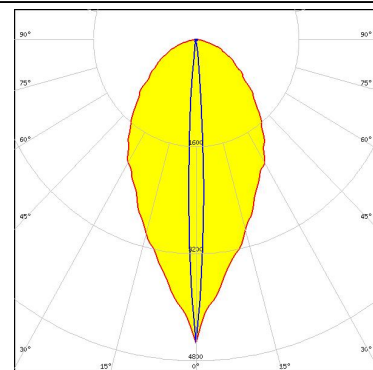

LUMILEDS


LED LUXEON Z ES
FWHM / FWTM 8.0 + 84.0° / 16.0 + 142.0°
Efficiency 97 %
Peak intensity 2.8 cd/Im
LEDs/each optic 1
Light colour White
Required components:

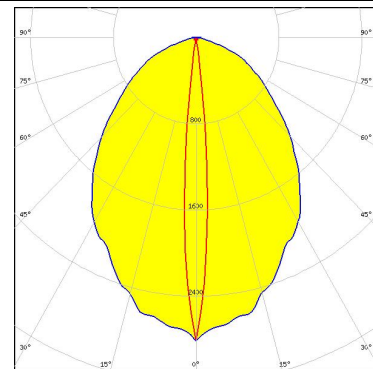


OPTICAL RESULTS (SIMULATED):




LED SFT-40-WCS
FWHM / FWTM 88.0 + 10.0° / 145.0 + 20.0°
Efficiency 97 %
Peak intensity 2.4 cd/lm
LEDs/each optic 1
Light colour White
Required components:

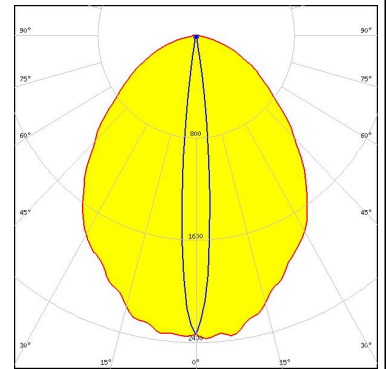


LED SFT-70X-WCS
FWHM / FWTM 96.0 + 14.0° / 148.0 + 23.0°
Efficiency 98 %
Peak intensity 1.8 cd/lm
LEDs/each optic 1
Light colour White
Required components:

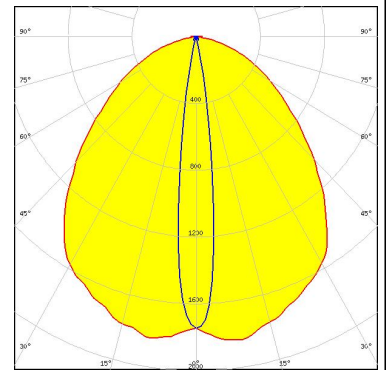

LED OSCONIQ P 3737 (3W version)
FWHM / FWTM 94.0 + 16.0° / 150.0 + 28.0°
Efficiency 97 %
Peak intensity 1.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:

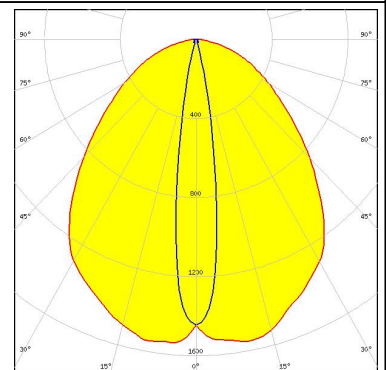

LED OSLON Signal
FWHM / FWTM 8.0 + 81.0° / 15.0 + 148.0°
Efficiency 97 %
Peak intensity 2.9 cd/lm
LEDs/each optic 1
Light colour White
Required components:

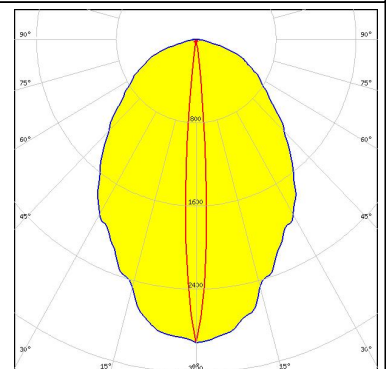


OPTICAL RESULTS (SIMULATED):

OSRAM

Opto Semiconductors


LED OSLON Signal
FWHM / FWTM 8.0 + 80.0° / 14.0 + 148.0°
Efficiency 97 %
Peak intensity 3 cd/lm
LEDs/each optic 1
Light colour White
Required components:

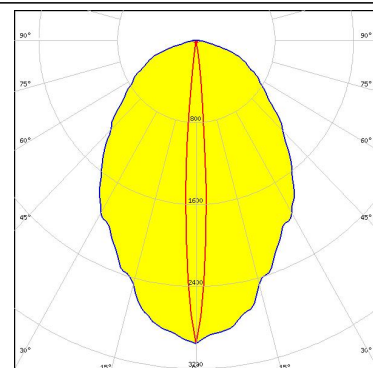

OSRAM

Opto Semiconductors


LED OSLON Signal
FWHM / FWTM 75.0 + 8.0° / 143.0 + 16.0°
Efficiency 97 %
Peak intensity 3.1 cd/lm
LEDs/each optic 1
Light colour Blue
Required components:

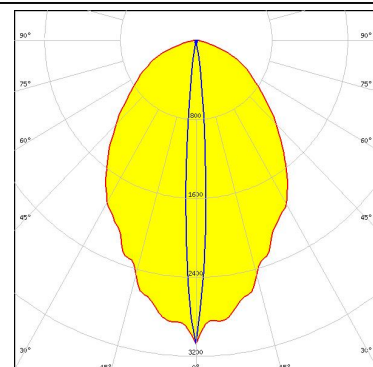

OSRAM


Opto Semiconductors

LED OSLON Signal
FWHM / FWTM 8.0 + 79.0° / 16.0 + 148.0°
Efficiency 97 %
Peak intensity 3 cd/lm
LEDs/each optic 1
Light colour White
Required components:

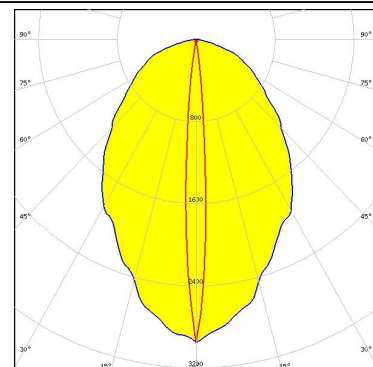


SAMSUNG

LED LH351C
FWHM / FWTM 97.0 + 16.0° / 137.0 + 27.0°
Efficiency 97 %
Peak intensity 1.7 cd/lm
LEDs/each optic 1
Light colour White
Required components:

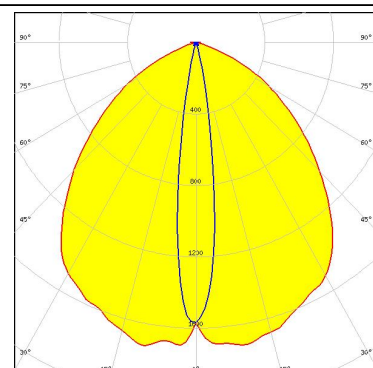

OPTICAL RESULTS (SIMULATED):

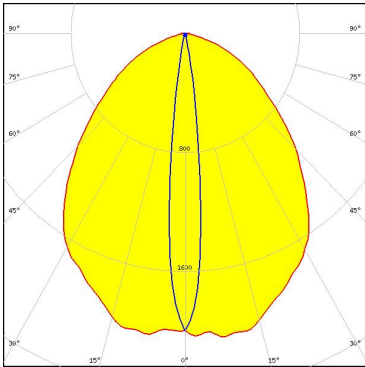	
LED	Z5M1/Z5M2
FWHM / FWTM	93.0 + 12.0° / 143.0 + 22.0°
Efficiency	97 %
Peak intensity	2.1 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	
	

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 13
FI-24240 SALO
Finland

LEDiL Inc.

228 West Page Street
Suite D
Sycamore IL 60178
USA

Ledil Optics Technology (Shenzhen) Co., Ltd.

405 , Block B
Casic Motor Building
Shenzhen 518057
P.R.CHINA

Local sales and technical support

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)

Shipping locations

Salo, Finland
Hong Kong, China

Distribution Partners

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)